

1N450 Germanium Diode Datasheet

FEATURES

Low forward voltage drop—low power consumption
Thirty years of proven reliability—one million hours mean time between failures (MTBF)
Very low noise level
Metallurgically bonded


ABSOLUTE MAXIMUM RATINGS (at 25 °C, unless otherwise specified)

Peak Inverse Voltage	120 Volts
Peak Forward Current	500 mA
Operating Temperature Range	- 65 °C to 85 °C
Average Power Dissipation	80 mW

ELECTRICAL CHARACTERISTICS

	Symbol	Conditions	Min	Max	Unit	T °C
Peak Inverse Voltage	PIV	1 mA	120		V	25 °C
Reverse Current	I_r	30 V		30	μ A	25 °C
Reverse Current	I_r	100 V		100	μ A	°C
Forward Voltage	V_f	50 mA		1	V	25 °C

MECHANICAL

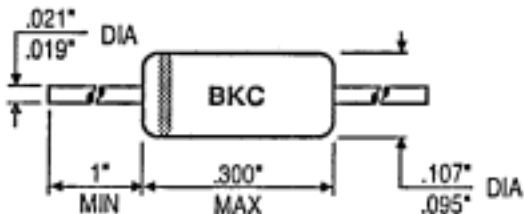

Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.